

Project :	Type:	
Drawn by:	Catalogue #:	Date:

Series Spec Sheet

POWER SUPPLIES 24 V DC LED DRIVERS

Class 2

Stanpro's 24 V constant voltage power supplies are available in different wattage options to support our LED tape systems.

FEATURES AND SPECIFICATIONS

• Construction

- Plug-in Power Supply (Driver)
- White finish

• Electrical

- Constant Voltage
- High efficiency up to 88%
- Input range: 100-240 V AC
- Leakage currect less than 0.25 mA at 240 V AC
- Suitable for dry location use (IP20)
- Warranty:
 - 2 years for 65750
- 3 years for 69554
- Operating temperature:
 - 65750: -5°C to 40°C (23°F to 104°F)
 - 69554: -20°C to 50°C (-4°F to 122°F)

OVERVIEW

Light source	LED
Watts (W)	36 - 60









quick ship

constant volts

















QUICK SHIP AND TECHNICAL SPECIFICATION TABLE :

Order code	Model number	DC connector	Watts	Volts	Output Volts	Input Current	Frequency	Power factor	Efficiency	IP rating	Operating Temperature	Warranty	Master case
		(Yes/No)	(W)	(VAC)	(VDC)	(mA)	(Hz)				(Range)	(yrs)	qty
Plug-in - Non-dimmable													
65750	LED/DRIVER/60W/24V/PLUG/ND/STD XY-60S-2402500Q-U	D Yes	60	100-240	24	1 600	50/60	0.5	88%	IP20	-5°C to 40°C	2	36
69554	LED/DRIVER/36W/24V/PLUG/ND	Yes	36	100-240	24	1 000	50/60	0.45	-	IP20	-20°C to 50°C	3	50


DIMENSIONS

65750





69554

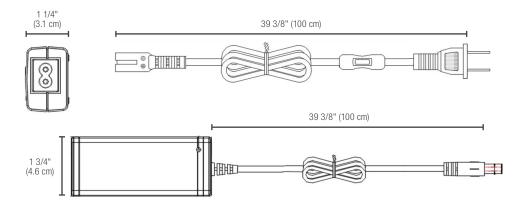



Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.

