

PROJECT:

DATE:

DISTRIBUTOR:

CATALOGUE #:

TYPE:

DRAWN BY:

CONTRACTOR:

PO:



LED TAPE LIGHT KITS WHITE AND RGB

STANPRO

SPEC SHEET

EASY DIY

FEATURES AND SPECIFICATIONS

CONSTRUCTION

Physical Characteristics

- Reel length 16.4' (5m)
- 12 V
- 9 LED/ft, 30 LED/m, 150 LED/reel
- Included in the kit:
 - 1 Tape light
 - 1 plug-in driver
 - 1 RGB remote control (for RGB kit only)
 - 2 End caps

Mounting

- 3M Adhesive backing for an easy installation to smooth surfaces
- Variety of fixing accessories: RGB connector, connector and mounting clips
- No soldering required with our variety of connectors and accessories available
- Additional driver can be ordered separately

PERFORMANCE DATA

- DC, Constant voltage
- Estimated lifespan of 30 000 hours to L70
- Can be installed outside (IP 64)
- Cannot be directly exposed to water or weather

Color Temperatures Available:

- RGB
 - Total reel wattage 27 W
 - Dimming is only available using the "Brightness +/-" option on the remote control
- Warm white (3 000 K) and Cool white (5 000 K)
 - Total reel wattage 27 W



3 YEARS
WARRANTY



CERTIFIED

QUICK SHIP AND TECHNICAL SPECIFICATION TABLE

Type	Order Code	Model Number	Watts (W)		Volts (V DC)	Color Temp. (K) ¹	Lumen Output (lm) ²		Life L70 (hrs) ³	Dimming (Yes/No)	Number of LED Chips		Master Case Qty
			(per ft.)	(per m.)			(per ft.)	(per m.)			(per ft.)	(per m.)	
REEL 16.4' (5 m)													
	61953	LED/TAPE/16.4'/5050/RGB KIT/12V/50M/STD	1.6	5.4	12	RGB	-	-	30 000	Yes	9	30	20
	61954	LED/TAPE/16.4'/5050/WW KIT/12V/50M/STD	1.7	5.6	12	3 000	123	396	30 000	No	9	30	20
	61955	LED/TAPE/16.4'/5050/CW KIT/12V/50M/STD	1.7	5.6	12	5 000	123	396	30 000	No	9	30	20

¹ Typical color temperature range: +/- 5 %.

² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.

³ Life hours are derived from IESNA LM-80 testing report and projected per IESNA TM-21 extrapolations.

LED DRIVERS*

Type	Order Code	Model Number	Type	Output Power (W)	Output Volts (V DC)	Length		Master Case Qty
						(per ft.)	(per m.)	
Plug-in - Non-dimmable								
	62265	LED/TAPE/36W/12V/WW+CW/PS/ND/STD	Low Voltage	36	12	6.56	2	50
	62266	LED/TAPE/36W/12V/RGB/PS/ND/STD	Low Voltage	36	12	6.56	2	50

*Additional drivers can be ordered separately.

ACCESSORIES*

Order Code	Model Number	Type	Quantity Per Pack	Master Case Qty	Figure
61956	LED/TAPE/RGB/CONNECTOR/STD	RGB Connector	10	50	A
61957	LED/TAPE/WW+CW/CONNECTOR/STD	Connector	10	100	B
62017	LED/10PCS TAPE LIGHT MOUNTING CLIPS	Mounting clips	10	100	C

*Order separately.



A



B



C



1 RGB remote control (for RGB kit only)



1 Plug-in driver




2 End caps




1 Tape light 16.4' (5m)

— INCLUDED IN THE BOX —

DIMENSIONS

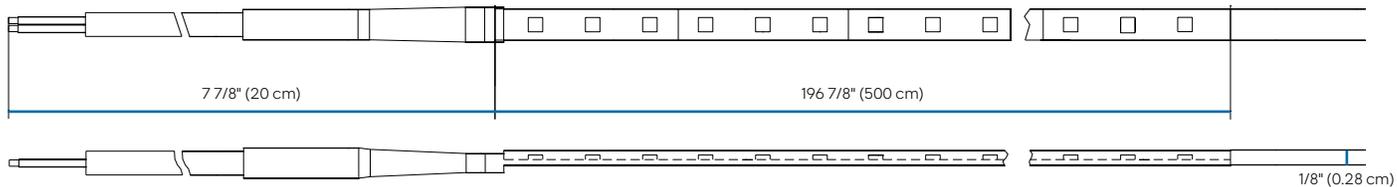

61953

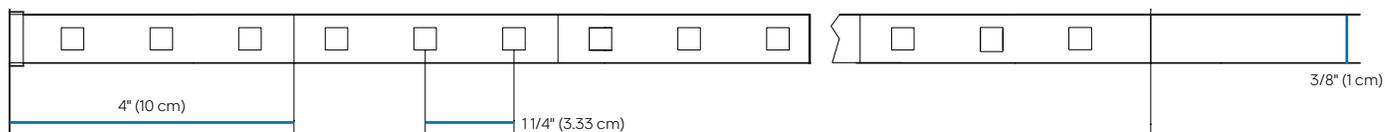

61954 - 61955

